


# Counter Installation

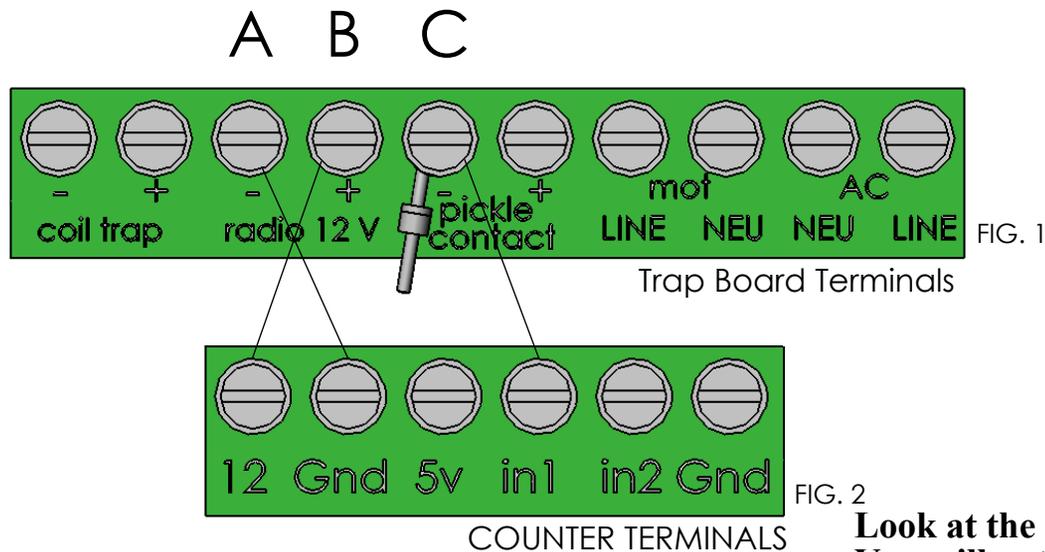

FOR ALL TRAP CONTROL  
BOARDS CARDS MARKED "BRILEY  
MANUFACTURING" IT IS SIMPLE AS  
ABC. USING FIG 1 ABOVE HOOK UP  
RED WIRE TO "A", HOOK UP WHITE WIRE  
TO "B" AND BLACK WIRE TO "C".

FOR ALL TRAP CONTROL  
BOARDS CARDS MARKED "MATTARELLI"  
USE THE INSTRUCTIONS ON THE RIGHT.

Look at the terminals on the counter. You will notice three wires attached to these terminals. Usually red, black and white wires. Red (+) and white (ground) wires provide 12 volt power for your counter. The black wire will generate a count every time your trap throws a target. Now for the installation: Counter terminal wire marked (12+) attaches to trap board terminal marked (RADIO 12 +); Counter terminal wire marked (GND -) attaches to trap board terminal marked (RADIO 12 -); Counter terminal wire marked (in1) attaches to trap board terminal marked (Pickle CONTACT -). In older Mattarelli boards this terminal may be marked "Contatto" or "Release". Use the (-) terminal. That's it, your done!