

SHOOTING RANGE

Skeet: 8 tripods


Trap: 5 tripods

EP096AT -L -C -P

Tripods with lamp, water proof connector and no-Bird Push-Button, plus microphone EP096AF-40

NOTE:

Use for stand lamps the model EPL-12-4 at 12 Vdc 0,4 Watts

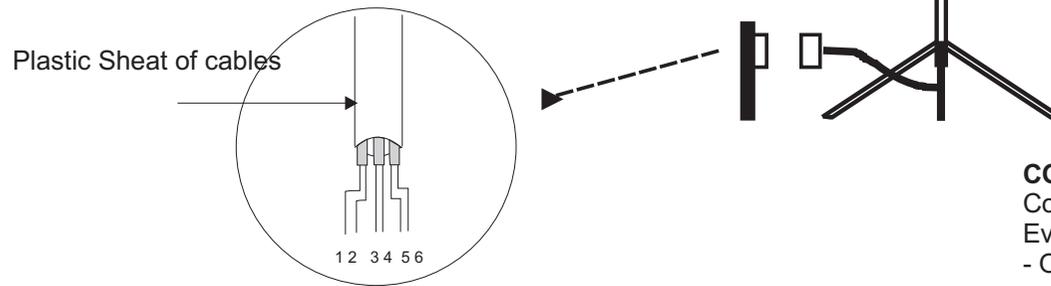

CONNECTION:

Connect every tripod with the control unit
Every cable is composed of:

- One shielded cable composed by two twisted wires, size of every wire = 1 sqmm or more - for microphone
- One shielded cable composed by two twisted wires, size of every wire = 1 sqmm or more - for lamps
- One shielded cable composed by two twisted wires, size of every wire = 1 sqmm or more - for No-Bird push-button

6 POLES CONNECTOR OF TRIPOD

PIN	FUNCTION
1	Microphone positive
2	Microphone negative
3	Lamp positive
4	Lamp negative
5	No bird positive
6	No bird negative
⏏	Not connected

Rev.: 1 Date: 10-02-08

Date of Rev. 0: 14-09-07

Sheet: 4 of 10

Prepared: R. E.

Checked: M. Montini

Approved: C. Fareri

DWG. No Int4-Microphone.cdr

Title: Multi-Pull System
Shooting Range
interconnection



Electronica Progetti

E.P. Electronica Progetti s.r.l.

Via degli Oleandri, 47
00040 Ariccia (RM) Italy

tel. (+39) 069342181

Fax (+39) 069344987

SINCERT

